


Winding instructions with the replacement cord

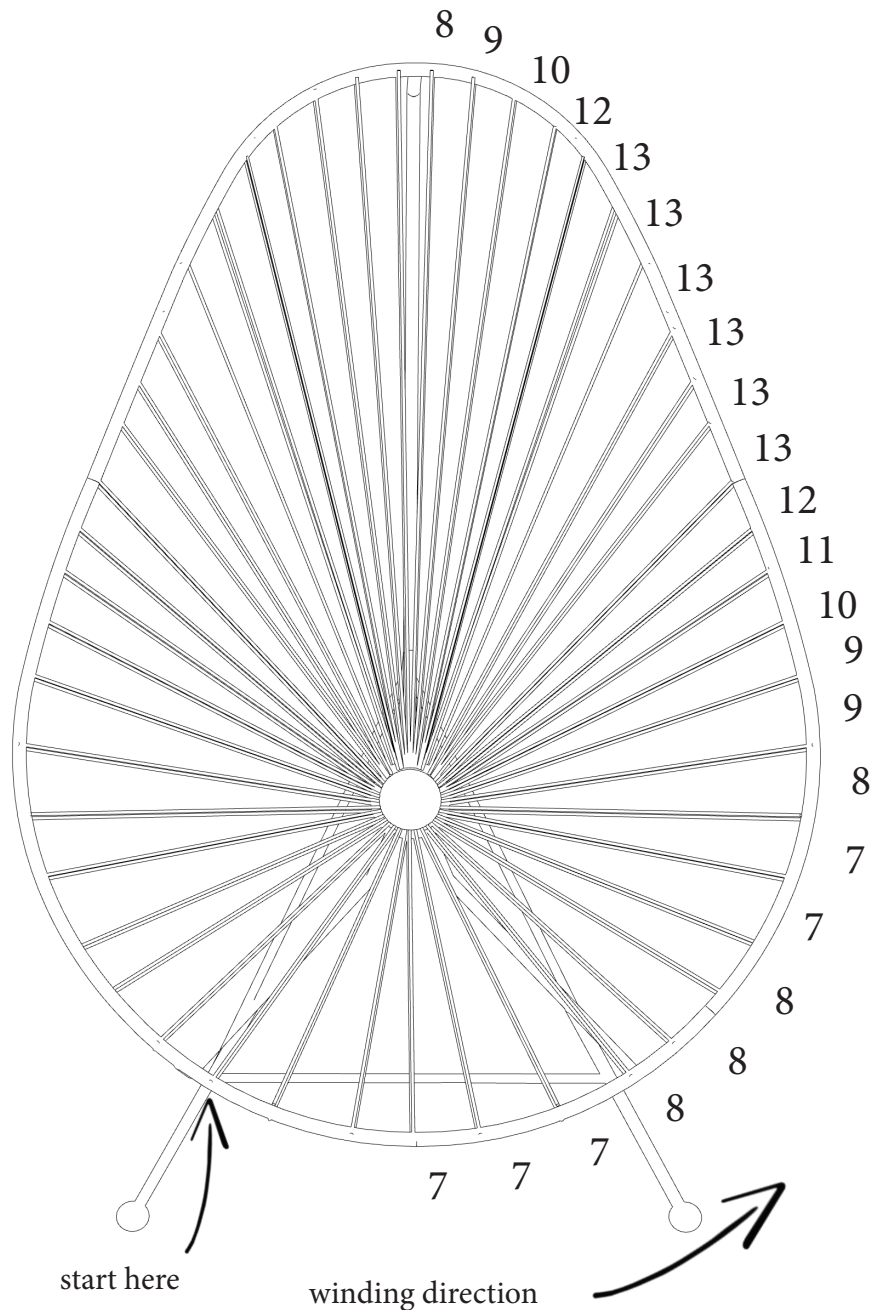

Read carefully all the bullet points and watch the video before starting!

- Start winding your PVC cord on the metal frame of the chair above the left foot. Work the cord back and forth between the middle circle.
- Once you made the first connection wrap the PVC cord around the frame the amount of times indicated on the drawing on the left (these numbers are approximate and they depend on the thickness of the cord)
- Make sure that the windings are denser in the area where most weight is put (middle top and middle bottom).
- It is important that you tighten the cord every time you make a long connection between the center circle and frame to provide better comfort whilst sitting.
- Work the details around the legs as indicated in the video.
Available here: <http://dev.okdesign.biz/index.php/product/replace-ment-cord/>
- The details of switching the cords are shown in the video as well.
- By the end, there are approximately 50-52 long strings connecting the chair frame to middle circle.